

# Acoustic Quilt





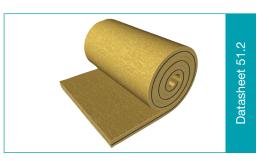

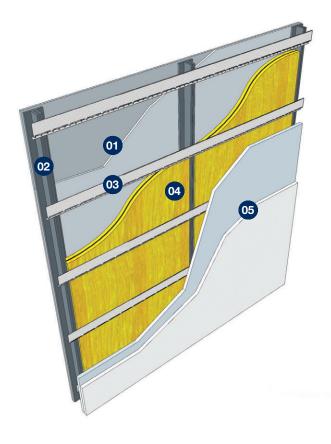

- 2 layers of staggered 15mm Acoustic Plasterboard
- 02 70mm Acoustic Metal Studs
- 03 Resilient Bars
- 04 JCW Acoustic Quilt
- 05 2 layers of staggered 15mm Acoustic Plasterboard

**Product Code**: 1030 - 1200mm Wide 1029 - 600mm Wide

Premium acoustic partition roll manufactured by sandwiching an acoustic barrier membrane between 2 layers of glass mineral wool

- Enhanced performance metal stud partition
- Easily fitted using dry lining skills
- Glass mineral wool layers complement the barrier membrane by absorbing sound

**Roll Size**: 52mm x 600mm x 5m (3.00 m²) **Weight**: 19 kgs

52mm x 1200mm x 5m (6.00 m²) **Weight**: 38 kgs

Typical Acoustic Performance of Wall Construction shown above Airborne: 50 dB Rw + Ctr

# **Method of Compliance**

Approved Document E/ Section 5 Scotland

Domestic Dwellings | Offices | Hotels | Conference Centres | Leisure Centres | Schools | Restaurants | Showrooms



# **JCW Acoustic Quilt Installation Guide**

# **Independent Ceiling**

Roll out and loose lay the JCW Acoustic Quilt in the opposite direction to the ceiling joists. Ensure that there are no gaps between each quilt layer. If necessary overlap the Quilt layers to maintain a continuous barrier.

### Single Frame Partition Wall & Independent Wall lining

It is important that the JCW Acoustic Quilt is adequately secured between the studs to prevent slumping. 2off L brackets secured into the top of the frame or stud may be required.

Disclaimer: The product and installation information contained in this Data Sheet and General Installation Guide is to the best of our knowledge correct. Please contact us direct, prior to starting works, for the latest information to enable confirmation of the specification.