


Techmel Foam

SOUND ABSORBERS



NBS Source
PARTNER

Datasheet 38

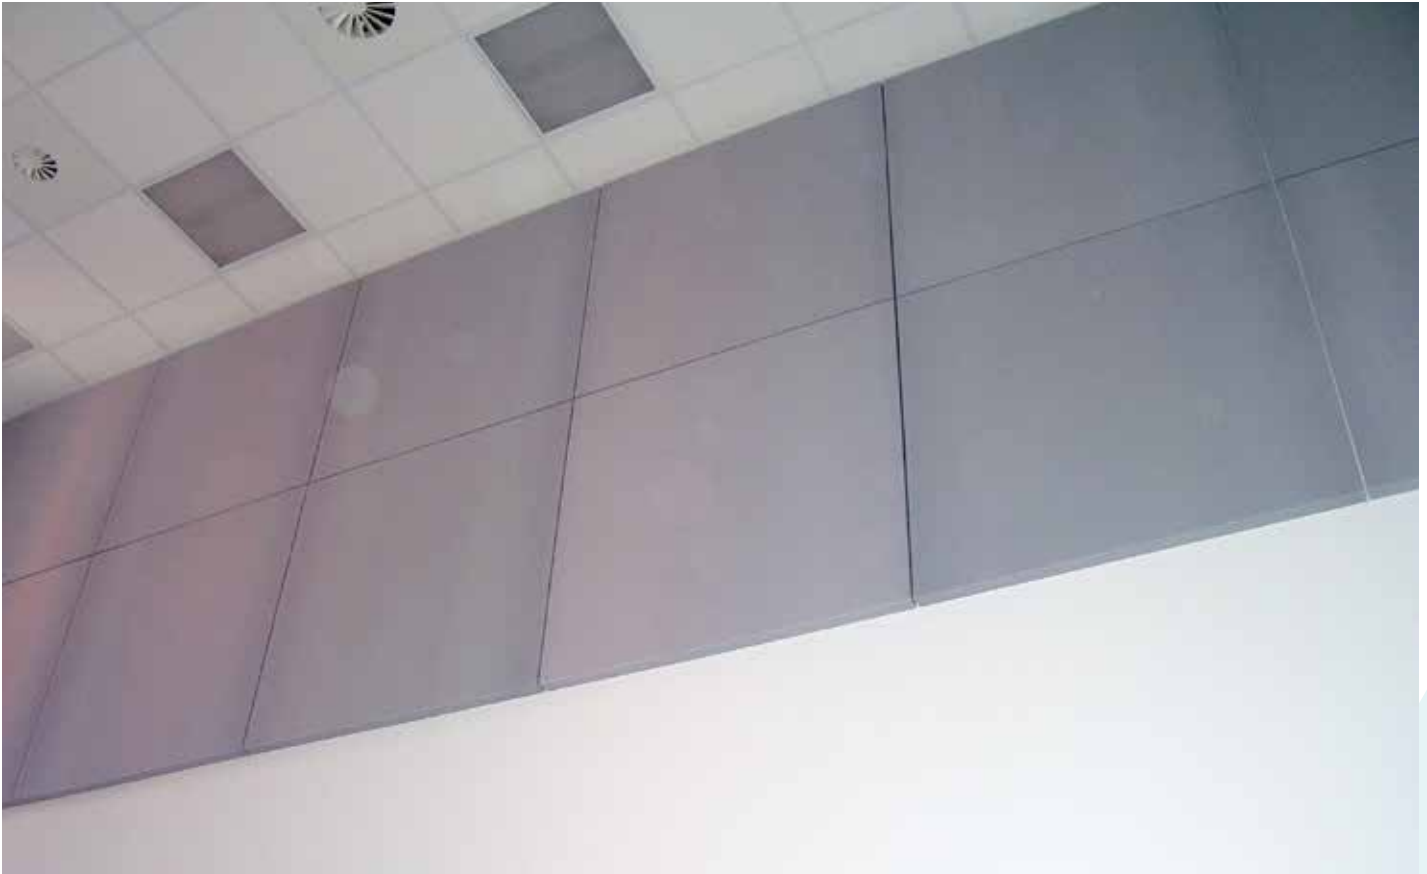

The Products

These panels, made from Melamine Foam, are designed to aid speech intelligibility. Suitable for direct bonding onto well prepared vertical or horizontal surfaces they can also be vertically hung.

Sizes, Colours and Finishes

Techmel Foam Panels are available in raw form or fabric covered. The raw form and the standard Cara and Lucia fabrics both meet the requirements of Class 1 Surface Spread of Flame when tested to BS476:Part 7 1997. Thermal conductivity: 0.035 W/mk @ 10°C. Standard and bespoke square or rectangular sizes are available to a maximum size of 2.5m x 1.25m. Various thicknesses available all to BS Absorber Classification C or greater.

Typical Applications

Schools, Multi-purpose Halls and any large space where reducing reverberation and increasing speech intelligibility is important.

Domestic Dwellings | Offices | Hotels | Conference Centres | Leisure Centres | Schools | Restaurants | Showrooms



Unit 32-34 Waters Meeting Development
Britannia Way, Bolton, BL2 2HH

Sales helpline **01204 548400**
8.30am - 5.00pm Monday to Friday

sales@acoustic-supplies.com
www.acoustic-supplies.com

The Products

Decorative sound absorption products specifically designed to reduce reverberant noise and aid speech intelligibility within a given environment. Techmel panels are suitable for direct bonding onto well prepared vertical or horizontal flat surfaces.

Techmel FBA – fabric covered absorber

Feature panels manufactured from ultra light weight, open cell Melamine Foam. FCA panels are available in straight edged shapes i.e. square or rectangular, in a variety of standard or bespoke sizes which offer flexible architectural and design applications.

Techmel PBA – plain bonded absorber

These decorative, flame retardant plain bonded panels are manufactured from ultra light, open cell natural Melamine Foam in a light light grey finish. Techmel PBA panels are available in a range of standard or bespoke shapes and sizes and can be cut and formed to create virtually any design shape, allowing for total flexibility in architectural application.

Colours and Finishes

Techmel FCA are available in two fabric ranges as standard; Cara fabric has an open hessian weave appearance, while Lucia fabric provides a crepe texture finish. See above for Techmel PBA colour information.

Installation Guidance

JCW provide a full supply and installation service or any competent contractor should be able to install the bonded or hanging absorber range. White linen gloves should be worn when handling and installing natural Melamine or Techmel Foam as it is difficult to clean once soiled. Shadow gap spacing is also suggested with Techmel Foam and butt jointing of these panels is not recommended due to the potential for minor expansion and contraction.

Technical Advice

Our qualified and experienced acoustic engineers can provide architects, consultants and contractors with detailed technical advice on product specifications, suitability, installation and reverberation time (RT) calculations needed to meet the required acoustic performance.



Operating Temperature

Techmel and Echo bonded products are compatible with all normal building temperatures.

Fire Performance

Both the plain panels and the Cara and Lucia fabrics both the requirements of Class 1 Surface Spread of Flame when tested to BS476: Part 7 1997. Screen fabrics can be chemically treated to provide Class "O" fire rating, subject to colours and minimum order quantity.

Thermal Conductivity: 0.035 W/mK @ 10°C

Domestic Dwellings | Offices | Hotels | Conference Centres | Leisure Centres | Schools | Restaurants | Showrooms



Unit 32-34 Waters Meeting Development
Britannia Way, Bolton, BL2 2HH

Sales helpline **01204 548400**
8.30am - 5.00pm Monday to Friday

sales@acoustic-supplies.com
www.acoustic-supplies.com

Packaging, Handling and Storage

Absorbers should be stored inside and under cover in a dry, well ventilated area protected from dirt and dust. Pallets should be kept level and not double stacked. Extreme care should be taken when handling and to avoid soiling the product.

Application and Fixing

Dimensional changes may occur in Techmel Ceiling Panel Absorbers dependent on the relative humidity of the area in which they are being installed. Absorbers should therefore be left to acclimatize for 24 hours before installation. For best results it is recommended that panels are hung with minimum 100mm spacing between them.

Acoustic Performance

Description	Thickness mm	Sound Absorption Co-efficient (tested to BS EN ISO 354:2003)					
		125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz
Techmel Plain Absorbers	25	0.04	0.22	0.54	0.74	0.88	0.92
	50	0.22	0.46	0.95	1.00	1.00	1.00
	100	0.61	1.00	1.00	1.00	0.99	0.97
Techmel Fabric Absorbers (Cara and Lucia)	25	0.05	0.27	0.68	0.89	1.00	0.94
	50	0.23	0.50	1.00	1.00	1.00	1.00
	100	0.60	1.00	1.00	1.00	0.98	0.96

Dimensions and Weight

Thickness mm	Nominal Size* mm	Nominal Weight of Absorber (Complete with Metal frame)
25mm	2500 x 1250	11.5kg
50mm	2500 x 1250	12.0kg
75mm	2500 x 1250	13.0kg
100mm	2500 x 1250	13.5kg

Care and Maintenance

The surface of Techmel Ceiling Absorbers can be cleaned periodically with a vacuum cleaner. Under no circumstances should they be submerged in water or subjected to a high pressure water jet spray. Stains on the fabric covering may be treated with an appropriate non-solvent based cleaning solution applied in accordance with the manufacturer's instructions.

Availability

Techmel Ceiling Absorbers are available to order and should only be fitted by suitably qualified tradesmen or specialist contractors.

Building Regulation Classification

Thickness	Absorber Classification (When tested to BS EN ISO 11654-1997)
25mm	C
50mm	B
75mm	B
100mm	A

*Other sizes and thicknesses are available to suit individual projects or a clients own design and detailing, subject to minimum order quantities. Further details are available on request. Note: **Direct Bonded Absorbers** have a maximum size of 1250mm x 1250mm.

Domestic Dwellings | Offices | Hotels | Conference Centres | Leisure Centres | Schools | Restaurants | Showrooms